
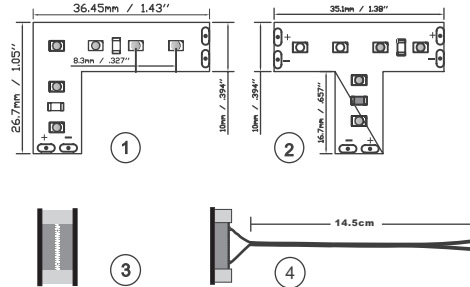


Flexible LED Strip

Flexmond™



Flexmond™ is so far the brightest flexible LED strip available in the market

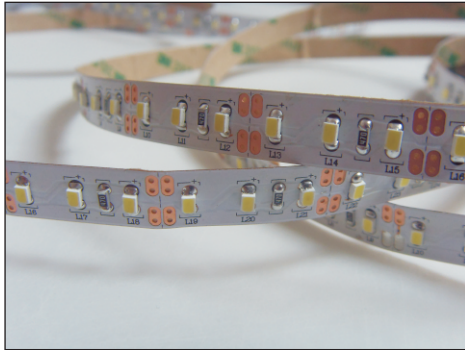

Connectors for cut


- ① SC-BID-CON1: Vertical connector
- ② SC-BID-CON2: T-shape connector
- ③ SC-BID-CON3: Ribbon to ribbon connector
- ④ SC-BID-CON4: Ribbon to wire connector

Printed circuit board layout

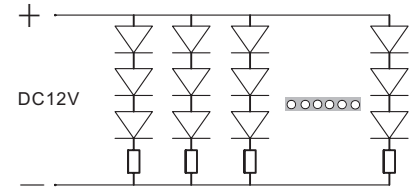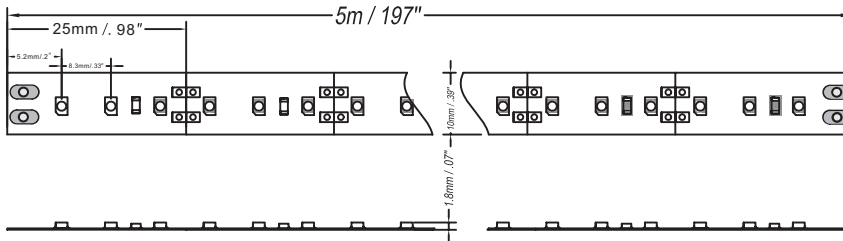

Application

- Cove lighting
- Architectural lights for canopy, corridor, window, archway
- Backlight or edge lighting for signage
- DIY lights for home use
- Path and contour marking
- Decorative lights for holiday, event, show, exhibition

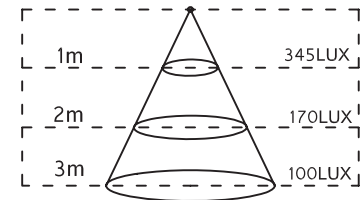

500mm/20" Luminance (white 6500K)

Model Number	Color	Length (m)	LED Q' ty	LED Type	Light Output (mcd)	Light Output (lumen)	Beam Angle (degrees)	Voltage (V DC)	Current (Amps)	Max. Power Consumption (W)	Continuous Connection (m)
BID-W	White	5	600	Power SMD	3500 X 600	5100	120	12	8	96	10
BID-WW	Warm White	5	600	Top LED	3000 X 600	4080	120	12	8	96	10